



Rugged and compact solution for utility and towing assignments.


The versatile and easy to maneuver MT3 is built for towing and utility work. It is a four wheel drive powerhouse with an 8,000 to 12,000 pound (3,628 – 5,443 kilograms) drawbar rating. The MT3 will carry a load up to 2,500 pounds (1,133 kilograms).

The MT3 is currently available with a Kubota 3.6 liter Tier 3 diesel configuration for export, or with a National Security Exemption for US operations. It comes standard with four wheel wet mesh disc brakes for rugged, reliable, low maintenance operations.

Customized configurations for every application are available.



Photos and illustrations may show optional equipment.

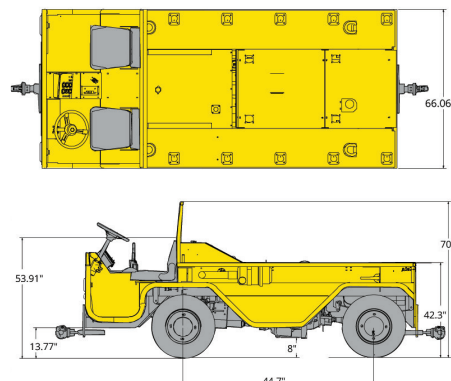

Features:

- ✓ 8,000 – 12,000 pound (3,628 – 5,443 kilogram) drawbar rating
- ✓ Tier 3 diesel (export or National Security Exemption only)
- ✓ Four wheel drive
- ✓ Factory new automatic transmission with separate transmission cooler
- ✓ Power assisted four wheel wet mesh brakes
- ✓ Front and rear suspension
- ✓ Heavy duty fixture welded steel frame
- ✓ Safety
 - Back up alarm
 - Horn
 - Anti-restart ignition switch
 - Engine safety shutdown (low oil pressure, high temperature)

MT3 Tow Tractor

	IMPERIAL	METRIC		IMPERIAL	METRIC
Drawbar pull capacity			Dimensions & data		
Model MT3-8K	8,000 lbs	3,628 kg	Height (without cab & with back guard)	70 in	178 cm
Model MT3-10K	10,000 lbs	4,535 kg	Height (with cab)	84.5 in	215 cm
Model MT3-12K	12,000 lbs	5,443 kg	Length	147.6 in	375 cm
Gross vehicle weight			Width	66 in	168 cm
Model MT3-8K	10,000 lbs	4,535 kg	Ground Clearance (less axle)	8 in	21 cm
Model MT3-10K	12,500 lbs	5,670 kg	Speed (forward)	18 mph	29 km/h
Model MT3-12K	15,000 lbs	6,804 kg	Speed (reverse)	5 mph	8 km/h

Drive System

Engine options

Diesel

Kubota 3600 (Tier 3, export or National Security Exemption only)

Jet A compatible

Cooling system

Full size liquid cooled radiator, isolated from vibration

Transmission

Factory new JCB PowerShift programmable four speed automatic transmission

Axles

Front: JCB

Rear: JCB

Tires

Front: LT25/75R-16

Rear: LT25/75R-16

Systems

Chassis

Heavy duty fixture welded steel frame

Steering

Power assisted

Braking

Front: Internal wet disc

Rear: Internal wet disc

Parking: Disc

Suspension

Front: Leaf spring with shock absorbers

Rear: Leaf spring with shock absorbers

Instrumentation

Fuel level

Oil pressure

Coolant temperature

Transmission oil temperature

Voltmeter

Engine hour meter

Lighting

Headlights

Taillights

Brake

Turn signals

Electrical

12V

Dual maintenance free batteries

90 amp alternator with internal regulator

Configurations

Standard

Adjustable operators seat with retractable seat belt

Passenger seat with retractable seat belt

Front and rear hitches

20 gallon (75 liter) fuel tank

Back up alarm

Anti-restart ignition switch

Zinc rich primer and white or safety yellow polyurethane top coat

Optional

Overhead guard

Cab:

All weather with heat and defrost

Air conditioning

Econo

With or without heat and defrost

Canvas doors

Hitch view and/or back up camera with LCD dash monitor

Mirror kit(s):

Left and right side mirrors

Hitch mirror(s)

Semi-suspension operators seat

Operator seat safety presence switch

LED amber beacon light

Low gear lock in switch

Speedometer

Master disconnect switch

License plate bracket

Fire extinguisher(s)

Tool and gear stowage lockers

Cargo rails for rear deck

Spare tire assemblies

Heavy duty winterization package to -40F

Snow plow attachment

Custom paint color

Consult factory for additional specialized configurations

Note: Specifications are subject to change without notice. Photos and illustrations may show optional equipment.